



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

---

*The functionality in this document is subject to parameter settings and operator privileges.*

*See Appendix for details on these settings.*

*See Instructional YouTube Video at this link [https://youtu.be/\\_aGgWBmxwpg](https://youtu.be/_aGgWBmxwpg)*

---

### Contents

Client Active/Mute Status.....	2
Warehouse Active/Mute Status.....	3
Checkout with Warehouse Active/Mute Functionality .....	4
Combining Client and Warehouse Active/Mute .....	5
Resolving Discrepancies (items shipped at checkout in place of booked items) .....	6
Appendix .....	9
Parameter Settings .....	9
Inventory Defaults .....	10
Operator Privileges .....	12
MS Word RTF Templates.....	12
RentalPoint Fast Reports .....	14



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

### Client Active/Mute Status

- Hold down the 'Ctrl' key and mouse click the checkbox to activate/mute a line
- Muted client lines will NOT show up on client facing documentation (i.e. quotes, invoices)
- Muted client facing lines DO NOT contribute to the price of the booking
- Comment and Sundry Line items can also be muted

New Client and Warehouse Active checkboxes

Modify booking

Out 19/03/18 0900 In 26/03/18 1800 AVBRIDG00004 Location 0 - Fitzroy North

Save Cancel

Customer Calendar Equipment Crew Venue/Shipping Notes Payments Attachments Other Details Status Followup

Activate for Client Mute for Client

Seq # 0:5.2.9 Parent: Level:0

Code	Description	Unit Rate	Days	%disc	Price	Stat	C	W
A3LED	Abson Pro 3.9mm LED Tile	75.67	3.00	0.00	227.01	Sng	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
HANG1	Hanging Bar-500x500-1 Panel	18.92	3.00	0.00	170.28	Sng	<input type="checkbox"/>	<input checked="" type="checkbox"/>
GP328	Motorola GP328 Two ways	30.00	3.00	0.00	180.00	Sng	<input checked="" type="checkbox"/>	<input type="checkbox"/>
FR1000	Fresnel 1000w	21.00	3.00	0.00	126.00	Sng	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
CF-FR	Colour Frame for Fresnel 1000w	2.10	3.00	0.00	12.60	prt	<input type="checkbox"/>	<input checked="" type="checkbox"/>
HC	Hook Clamp - 50mm	2.10	3.00	0.00	25.20	prt	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SW	Safety Wire	2.10	3.00	0.00	12.60	prt	<input type="checkbox"/>	<input checked="" type="checkbox"/>
H-STAND	Floor Stand with Bolt	2.10	3.00	0.00	6.30	Sng	<input type="checkbox"/>	<input checked="" type="checkbox"/>
SW	Safety Wire	2.20	3.00	0.00	13.20	prt	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CF-FR	Colour Frame for Fresnel 1000w	2.20	3.00	0.00	13.20	prt	<input type="checkbox"/>	<input checked="" type="checkbox"/>
H-STAND	Floor Stand with Bolt	2.20	3.00	0.00	6.60	Sng	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Toggle icon to show/hide client facing lines on the equipment grid  
 White Background - Do not show client facing lines  
 Shaded Background - Show me client facing lines

Client muted lines show shaded

Comment and Sundry line items can also be muted for both client and warehouse

Air fare cost:670.00	804.00	sund	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Flight is with Air Canada #1009			<input type="checkbox"/>	<input checked="" type="checkbox"/>
Arriving 1810			<input type="checkbox"/>	<input checked="" type="checkbox"/>
Departing 1509			<input type="checkbox"/>	<input checked="" type="checkbox"/>

If a sundry line is muted then the price for the sundry will not be included in the booking price.




# Equipment Grid

## Client or Warehouse Active/Mute Functionality

### Warehouse Active/Mute Status

- Hold down the 'Ctrl' key and mouse click the checkbox to activate/mute a line
- Muted warehouse lines will NOT show up on warehouse screens or documentation (i.e. checkout windows/picklist)
- Muted warehouse lines are NOT subject to Availability Checking, do NOT appear on Running Balance and are NOT reserved

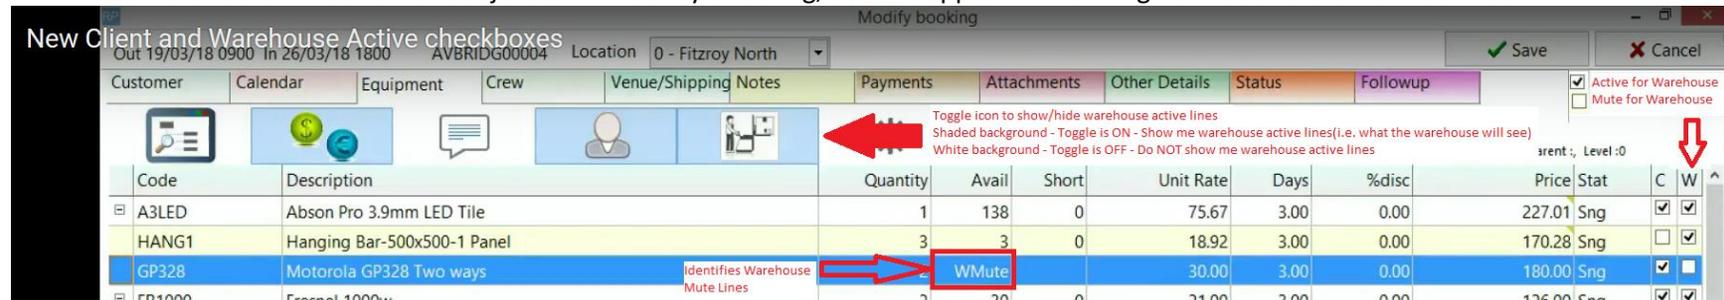

Once checked out, a line cannot be warehouse muted. So for example if there is a number in the out column as below, then the line cannot be muted –




If there is "OK" in the avail column then the line has been checked out and then cannot be muted.

Items inside a **rack** cannot be individually warehouse muted, the entire rack and all the items packed in it, must either be active or muted.

Headings cannot be muted for either client or warehouse, clicking the active checkbox for a heading will apply the click to all the items in the heading, then individual lines inside the heading can be muted or made active. The heading line itself, will print if any items in the heading are active.

### Shortcut keys

The shortcut keys to change Client active/Mute for a line item are – Shift+F2 to change to Active and Shift+F3 to Mute, these options are also on the right click menu as below -






# Equipment Grid

## Client or Warehouse Active/Mute Functionality

The shortcut keys for Warehouse Active/mute are Shift+F4 and Shift+F5, these options are also on the right click menu.



### Checkout with Warehouse Active/Mute Functionality

- Partial Checkouts will not affect the Warehouse Active/Mute status of an equipment line
- Final Checkouts however, indicate that all items leaving the warehouse have now been checked out; therefore, any items booked but NOT checked out on the booking will be muted for warehouse so as not to affect availability for future bookings.

Modify booking

Out 19/03/18 0900 In 26/03/18 1800 AVBRIDG00004 Location 0 - Fitzroy North

Customer Calendar Equipment Crew Venue/Shipping Notes Payments Attachments Other Details Status Followup

Shows Items checked out

Code	Description	Quantity	Avail	Short	Unit Rate	Days	%disc	Price	Stat	Out	In	C	W
A3LED	Abson Pro 3.9mm LED Tile	1	OK		75.67	3.00	0.00	227.01	Sng	1	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
GP328	Motorola GP328 Two ways	2	14	0	30.00	3.00	0.00	180.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
FR1000	Fresnel 1000w	2	OK		21.00	3.00	0.00	126.00	Sng	2	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PAR56	Par 56 240v (300w) medium narrow	4	OK		4.40	3.00	0.00	52.80	Sng	4	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PAR64	Par 64 110v (1000w) medium narro	2	OK		2.75	3.00	0.00	16.50	Sng	2	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<b>STROBE</b>	<b>Hi-Intensity Strobe Light</b>	<b>1</b>	<b>WMute</b>		<b>11.00</b>	<b>3.00</b>	<b>0.00</b>	<b>33.00</b>	<b>Sng</b>	<b>0</b>	<b>0</b>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
SOLAR	Solar 250 projector with effect	1	WMute		18.70	3.00	0.00	56.10	Sng	0	0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
SNAKE-L	SnakeLight 10m, and flowbox.	1	WMute		16.50	3.00	0.00	49.50	Sng	0	0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
DOMEL	Dome light 300w	1	WMute		0.00	3.00	0.00	0.00	Sng	0	0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
TAS	Tas super fogger	1	WMute		66.00	3.00	0.00	198.00	Sng	0	0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
COL-WHEL	Colour wheel, suit patt 23	1	WMute		5.50	3.00	0.00	16.50	Sng	0	0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
M40X60	Marquee 40x60	1	See	List	800.00	3.00	0.00	2,400.00	PAK			<input checked="" type="checkbox"/>	<input type="checkbox"/>
SLV1	Roadcase UHF Sleeve	1	WMute		0.00	3.00	0.00	0.00	Sng	0	0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Air fare cost:670.00							804.00	sund			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Items NOT checked out on Final Checkout so they have been automatically muted for warehouse so that they don't affect availability for future bookings



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

### Combining Client and Warehouse Active/Mute

Using a High-Intensity Overhead Projector as an example

- Showing the client, a generic description and cost for the projector
- Choosing a particular projector to send out dependant upon the employee going out to operate it

New Client and Warehouse Active checkboxes

Modify booking

Out 09/09/18 0800 In 18/09/18 1900 ACREDIT00002 Location 0 - Fitzroy North

Save Cancel

Customer	Calendar	Equipment	Crew	Venue/Shipping	Notes	Payments	Attachments	Other Details	Status	Followup	Seq # 0:3.12.1 Parent -, Level :0			
Code	Description	Quantity	Avail	Short	Unit Rate	Days	%disc	Price	Stat	Out	In	C	W	
ULX2-M2	Shure ULX2-M2 Handheld Transmitter - Beta58	2	9	0	86.25	1.00	0.00	172.50	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
B58INS	Shure Beta58 Insert for ULX2 Radio Mic Transmitter	2	18	0	11.50	1.00	0.00	23.00	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
WA370A	Shure WA370A Handheld Mic Clip	2	8	0	28.75	1.00	0.00	57.50	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
ULXP4-M2	Shure ULXP4-M2 Professional Receiver	1	11	0	86.25	1.00	0.00	86.25	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
PS40AZ	Shure ULXP4 Power Supply	1	9	0	0.00	1.00	0.00	0.00	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
UA820L	Shure UA820L UHF BNC Antenna (Yellow)	2	16	0	86.25	1.00	0.00	172.50	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
UR4D-Q5	Shure UR4D-Q5 Dual Channel Receiver	3	11	0	184.00	1.00	0.00	552.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
UA845WB	Shure UA845WB Ant / Power Distro	1	4	0	115.00	1.00	0.00	115.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
OH	Hi-Intensity Overhead Projector	1	OK	0	260.00	1.00	0.00	260.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
SVP	100" Sony video proj, 7x5 image	1	OK	0	210.00	1.00	100.00	0.00	Sng	1	0	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

Active for Client so visible on documentation, adds to price of booking

Muted for warehouse so won't show up on checkout and not subject to availability checks

Muted for Client (so no cost, no availability check and not visible to client)

Active for warehouse so warehouse will know what to ship, availability checks performed



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

Resolving Discrepancies (items shipped at checkout in place of booked items)

For a full explanation of resolving discrepancies functionality see help doc at this link  
<http://rentp.com/KnowledgebasePDFs/Resolving%20Discrepancies.pdf>

Scenario

- Sony Video Projector was shipped in place of the Hi Intensity Projector (a final checkout has not been done)

New Client and Warehouse Active checkboxes

Code	Description	Quantity	Avail	Short	Unit Rate	Days	%disc	Price	Stat	Out	In	C	W	
ULX2-M2	Shure ULX2-M2 Handheld Transmitter - Beta58	2	9	0	86.25	1.00	0.00	172.50	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
B58INS	Shure Beta58 Insert for ULX2 Radio Mic Transmitter	2	18	0	11.50	1.00	0.00	23.00	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
WA370A	Shure WA370A Handheld Mic Clip	2	8	0	28.75	1.00	0.00	57.50	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
ULXP4-M2	Shure ULXP4-M2 Professional Receiver	1	11	0	86.25	1.00	0.00	86.25	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
PS40AZ	Shure ULXP4 Power Supply	1	9	0	0.00	1.00	0.00	0.00	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
UA820L	Shure UA820L UHF BNC Antenna (Yellow)	2	16	0	86.25	1.00	0.00	172.50	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
UR4D-Q5	Shure UR4D-Q5 Dual Channel Receiver	3	11	0	184.00	1.00	0.00	552.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
UA845WB	Shure UA845WB Ant / Power Distro	1	4	0	115.00	1.00	0.00	115.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
OH	Hi-Intensity Overhead Projector	1	78	0	260.00	1.00	0.00	260.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<b>Equipment added on checkout - Date:26/01/17 @ 1921</b>										<b>heading</b>			<input type="checkbox"/>	<input type="checkbox"/>
SVP	100" Sony video proj, 7x5 image	1	OK		210.00	1.00	100.00	0.00	Sng	1	0	<input type="checkbox"/>	<input type="checkbox"/>	

Sony Video projector added at checkout in place of Hi-Intensity Overhead Projector  
 Visible to warehouse, NOT visible to client

Resolve using ONE of three methods

1. Final checkout the booking, the unshipped Hi-Intensity Projector will be muted for warehouse since it wasn't checked out
2. You may have other work to do on the booking before final checkout, but you want to ensure other users are aware of the match
  - a. Edit the booking and MUTE the Hi-Intensity Projector for warehouse
  - b. OR match the items using Resolve Discrepancy Window (see below)



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

Resolve Discrepancies [ACREDIT00002]

Booked But Not Shipped (Items In The Booking)

Code	Description	Ordered	Shipped	Quantity	Action	ID
B58INS	Shure Beta58 Insert for ULX2 Radio Mic	2	0	2	Match	2
PS40AZ	Shure ULXP4 Power Supply	1	0	1	Match	5
UA820L	Shure UA820L UHF BNC Antenna (Yellow)	2	0	2	Match	6
UA845WB	Shure UA845WB Ant / Power Distro	1	0	1	Match	8
ULX2-M2	Shure ULX2-M2 Handheld Transmitter -	2	0	2	Match	1
ULXP4-M2	Shure ULXP4-M2 Professional Receiver	1	0	1	Match	4
UR4D-Q5	Shure UR4D-Q5 Dual Channel Receiver	3	0	3	Match	7
WA370A	Shure WA370A Handheld Mic Clip	2	0	2	Match	3

Split Line Find Next Change All Lines To: Match

Shipped But Not Booked (Items Added At Checkout)

Tag	Code	Description	Quantity	Charge/backup	ID

Iag Un Tag Change All Lines To:

---

Resolved Equipment

- Equipment Ordered
  - OH - Hi-Intensity Overhead Projector [1,0,1]
    - Was replaced by
      - SVP - 100" Sony video proj, 7x5 image [1]

Items matched via Resolve Discrepancy

Notes

Match equipment on the left with equipment on the right. To select multiple items, Tag multiple lines. Equipment already shipped cannot be deleted.

You can either Match or Delete equipment in the 'Booked But Not Shipped' grid. For booked items you want to match to shipped items, select the 'Match' option. For items that you want to delete from the booking, select the 'Delete' option.

Items shipped but not booked can have a Charge / Backup / No Charge applied to them.

Add Comment Lines Save Cancel



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

New Client and Warehouse Active checkboxes

Out 09/09/18 0800 In 18/09/18 1900 A CREDIT00002 Location 0 - Fitzroy North

Modify booking

Save Cancel

Code	Description	Quantity	Avail	Short	Unit Rate	Days	%disc	Price	Stat	Out	In	C	W
ULX2-M2	Shure ULX2-M2 Handheld Transmitter - Beta58	2	9	0	86.25	1.00	0.00	172.50	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
B58INS	Shure Beta58 Insert for ULX2 Radio Mic Transmitter	2	18	0	11.50	1.00	0.00	23.00	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
WA370A	Shure WA370A Handheld Mic Clip	2	8	0	28.75	1.00	0.00	57.50	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ULXP4-M2	Shure ULXP4-M2 Professional Receiver	1	11	0	86.25	1.00	0.00	86.25	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
PS40AZ	Shure ULXP4 Power Supply	1	9	0	0.00	1.00	0.00	0.00	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
UA820L	Shure UA820L UHF BNC Antenna (Yellow)	2	16	0	86.25	1.00	0.00	172.50	prt	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
UR4D-Q5	Shure UR4D-Q5 Dual Channel Receiver	3	11	0	184.00	1.00	0.00	552.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
UA845WB	Shure UA845WB Ant / Power Distro	1	4	0	115.00	1.00	0.00	115.00	Sng	0	0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
OH	Hi-Intensity Overhead Projector	1	WMute		260.00	1.00	0.00	260.00	Sng	0	0	<input checked="" type="checkbox"/>	<input type="checkbox"/>
SVP	100" Sony video proj, 7x5 image	1	OK		210.00	1.00	100.00	0.00	Sng	1	0	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	1 X OH:Hi-Intensity Overhead Projector were ordered but 0											<input type="checkbox"/>	<input checked="" type="checkbox"/>
	SVP was shipped.											<input type="checkbox"/>	<input checked="" type="checkbox"/>

Once "matched" in the resolve discrepancy window, the replacement product is now added below the original item. Previous versions of RentalPoint, replaced the original product with the replacement. The replacement process now uses the active and mute checkboxes to replace the product as far as warehouse active. The replacement will be warehouse active and the original product will now be warehouse muted, as per the above example.




# Equipment Grid Client or Warehouse Active/Mute Functionality

## Appendix

### Parameter Settings

Accessible via Setup → Parameters → Operational Parameters:

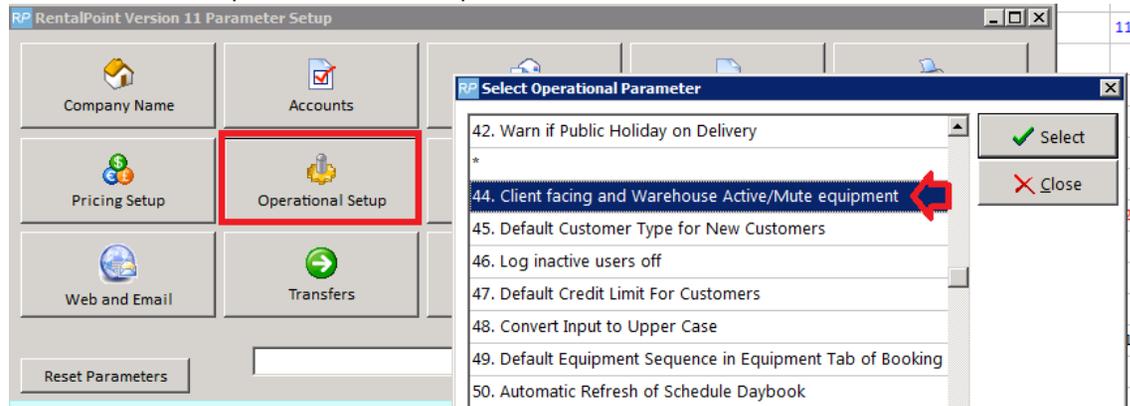

Once the parameter is set, ALL items in your current bookings will show active status for both client and warehouse (including components). Rather than individually unchecking all components for the client box, you can uncheck ALL components (prt items) using the menu option below.



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

Out 07/03/17 0700 In 10/03/17 1700 ALLI8000010 Location 0 - Fitzroy North

Customer Calendar Equipment Crew Venue Notes Payments Attachments Other Details Status Follow up

Seq # 1:2.2.4 Parent: Level:2

Code	Description	Avail	Short	Unit Rate	Days	%disc	Price	Stat	C	W
RM-HH	Auditorium   Outb	See	List	172.50	1.00	0.00	172.50	PAK	headi	✓
ULXP4-M2	Shure ULXP4-M2 P	11	0	29.40	1.00	0.00	29.41	prt		✓
PS40AZ	Shure ULXP4 Power	9	0	0.00	1.00	0.00	0.00	prt		✓
UA820L	Shure UA820L UHF	16	0	29.40	1.00	0.00	58.81	prt		✓
ULX1-M2-	Shure ULX1-M2 Boc	18	0	29.40	1.00	0.00	29.40	prt		✓
WL93	Shure WL93 Omni S	11	0	3.92	1.00	0.00	3.92	prt		✓
WL184	Shure WL184 Super	3	0	7.84	1.00	0.00	7.84	prt		✓
ULX2-M2	Shure ULX2-M2 Ha									
B58INS	Shure Beta58 Insert									
WA370A	Shure WA370A Har									
UR-8PAK	Shure UR 8 Pack									
UR4D-Q5	Shure UR4D-Q5 Du									
UR1-Q5	Shure UR1-Q5 Body									
UR2-Q5	Shure UR2-Q5 Han									
UA845WB	Shure UA845WB Ar									
		Rack		50.73	1.00	0.00	405.88	prt		✓
		Rack		67.65	1.00	0.00	67.65	prt		✓

### Inventory Defaults

- Default warehouse active/mute status can be set in product setup.
- When the parameter is initially activated, all existing inventory is set to 'warehouse active = yes'
- Client Facing Print defaults also available for items used as Product/Package component



# Equipment Grid

## Client or Warehouse Active/Mute Functionality

RP Edit Product Record : Hi-Intensity Overhead Projector

General Picture Rental Rates Sales Notes Location Attachments

Product Information

Product Code OH

Description Hi-Intensity Overhead Projector

Model No.

Color

Qty Owned 131.00 (All Locations)

Country of Origin

Revenue Code

Default Accessory Discount

Non-tracked Barcode

Printing Descriptions Printing Options

- Active for printing on all Client facing documents
- Print Product On Sub rental P.O. ?

When this product is a component - whether to print

- Active for printing on all Client facing documents
- Suppress from delivery schedule

Product Options Transfer Options Unit Specifications

- For Individual Rental / Sale ?
- Barcode Track
- Don't allow product to be discounted
- Product is a Generic Item
- Expand When Added to a Booking
- Auto Checkout this Item
- Warehouse active




# Equipment Grid

## Client or Warehouse Active/Mute Functionality

### Operator Privileges

Accessible via setup → Operators → Edit Operator Group

Grant/Restrict access to the active/mute functionality according to the group the operator belongs to.

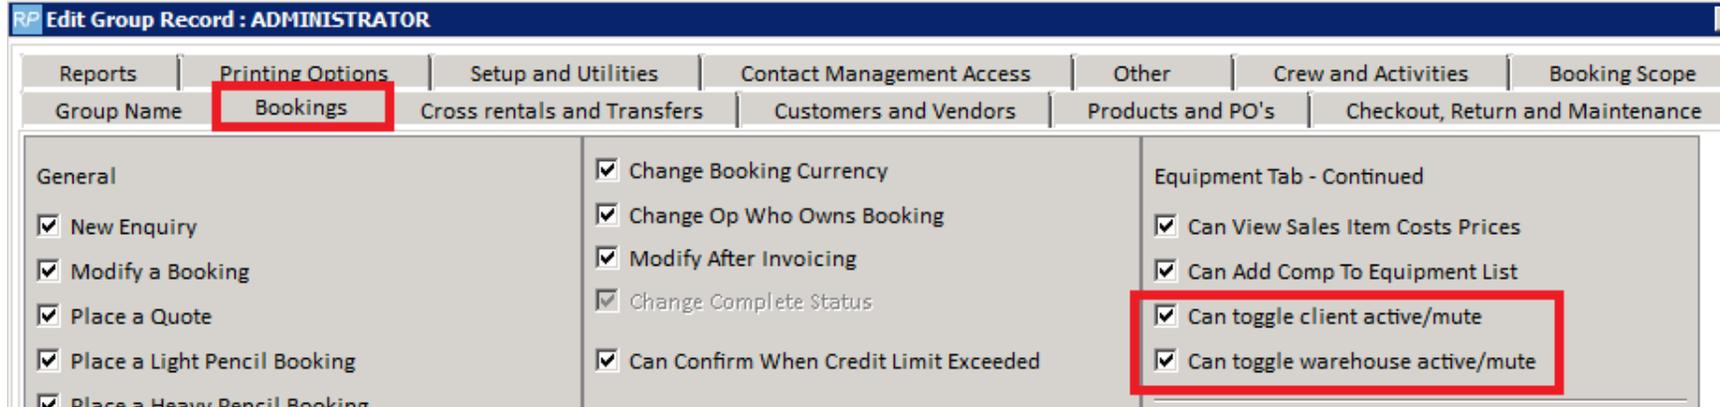


### MS Word RTF Templates

In order to rely on the Warehouse or Client Active/Mute functionality on MS Word RTF templates, you will have to remove the following control insert fields:

- &XCOMP& This insert field will *EXCLUDE ALL* equipment components from the output doc regardless of Active/Mute settings
- &INCCOMP& This insert field will *INCLUDE ALL* equipment components on the output doc regardless of Active/Mute settings

When editing RTF Templates:


- Take a backup of your template before modifying
- Either edit the document in your DOCS\Templates directory

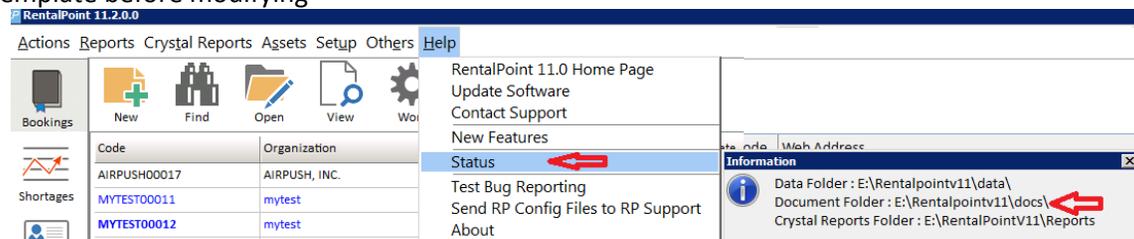

# Equipment Grid

## Client or Warehouse Active/Mute Functionality

- OR edit directly from the Print Template screen as below

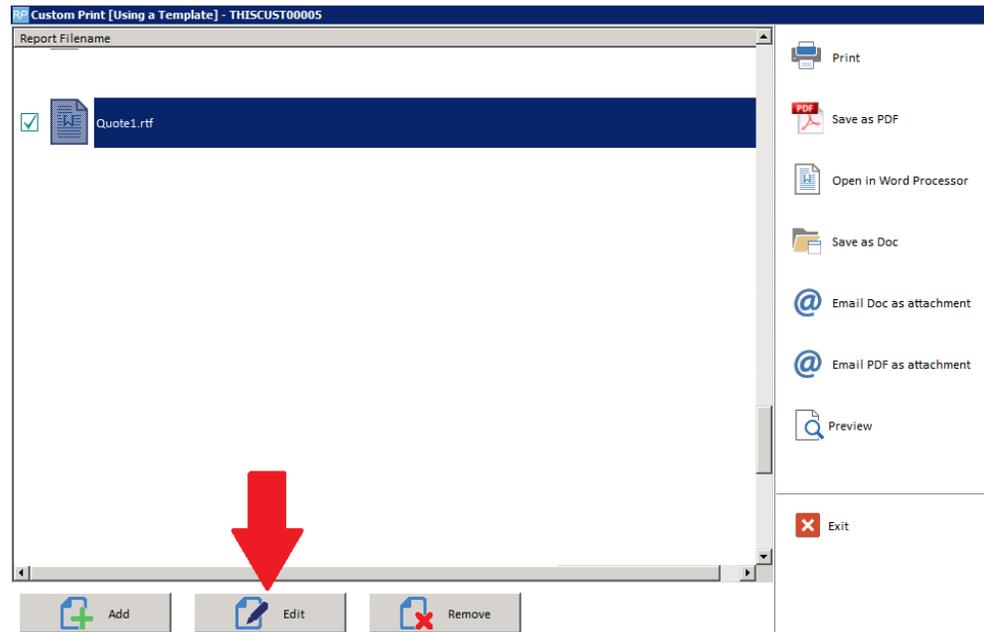

- Remove &XCOMPC&

<b>Location/Event Site(s):</b> &delToC&		<b>Deliver By:</b> &del
<b>Set Up By:</b> &SETUDAYC& &SETUPDN& &setupC&		<b>Rehearsal:</b> &RE
<b>Show Start:</b> &SHOWSDAC& &SHWSDN& &SHWSTIMC&		<b>Show Finish:</b> &S
<b>Strike:</b> &STRIDAYC& &STRIKEDN& &strikeC&		<b>Pick Up for Ret</b>
<b>Booking Contact</b> &bcontC&	<b>Purchase Order</b> &orderNoC&	<b>Date O</b> &dor
<b>Contact Phone</b> &contphc&	<b>Order Taken By</b> &opC&	<b>Confirm</b> &CONF
&CONMTOSC&&XCOMPC&		
<b>Code</b>	<b>QTY</b>	<b>Description</b>
		<b>Days Charged</b>



## Equipment Grid

### Client or Warehouse Active/Mute Functionality

#### RentalPoint Fast Reports

If you have custom RentalPoint Fast Reports, you may need to modify your stored procedures to ensure the client or warehouse active/mute settings are taken into consideration when printing these documents.

- Goto Setup→Fast Report from the main RentalPoint menu
- You will either need to modify the stored procedure used by your Fast Report to
  - pull the two new fields (i.view\_logi and i.view\_client) from the tblitemtran table to your report, and print conditionally on the values
  - OR change the stored procedure to only pull items that are warehouse or client active (depending on the report you are running).
- See youtube video demonstration at this link [https://www.youtube.com/watch?v=aa4x\\_EpmFCI](https://www.youtube.com/watch?v=aa4x_EpmFCI)
- Please contact Rentalpoint support for further details if needed.